



DIGICHAIN

Electric chain hoist with hand
positionner on hooks for loads
of up to 500 kg



DIGICHAIN

Electric chain hoist with hand positionner on hooks for loads of up to 500 kg

+ ergonomics

A workstation meeting fully the demanding requirements of today's users.

With DIGICHAIN and positionner on hook your loads ranging from 63 to 500 kg can be effortlessly positioned with spot-on accuracy.

The orientation of the hoisting hook and handling grip can be suitably adapted by means of the adjustment screw.

100% safety The DIGICHAIN handling system enables you to lift your loads up to a height of 5 meter.



DIGICHAIN VR2




+ safety

The DIGICHAIN handling system enables you to lift your loads up to a maximum height of 5 meters.

- > Coil-formed control cable eliminates all risk of snarling up.
- > Upper and lower limits switches, for greater operating safety.
- > Hoisting hook can be dismantled and replaced with other hoisting or gripping tools.
- > Low Voltage 48 volt control system ensuring maximum operator safety.

Technical characteristics

- > Load capacity : 63 to 630 kg.
- > Maximum hoisting height : 5 meters.
- > Upper and Lower limit switches.
- > Dismountable hoisting hook.
- > 48 volts Low voltage control system.
- > Weight : 3.2 kg.
- > Storage temperature : -40°C to +60°C.
- > Service temperature : -20°C to +40°C.
- > Relative humidity : 90%.
- > Maximum side pull operability : 3 degrees.

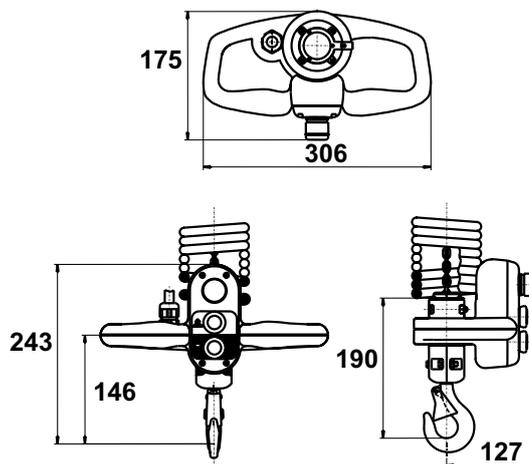

EUROCHAIN® VR VARIO


Electric chain hoist Stepless lifting speed

The electric chain hoist EUROCHAIN® VR VARIO with stepless lifting speed includes the following equipment as standard:

- > Stepless hoisting speed through inverter control.
- > Adjustable acceleration/deceleration ramp time.
- > EP, MS or analog control modes with load adaptive ESR functionality.
- > Brake control with supervision.
- > Over speed supervision.
- > Clutch slippage supervision.
- > Electronic overload prevention through load sensor.
- > Programmable hoisting limits set by pendant (available at a later phase).
- > Shock load control.
- > Hour counter, start counter, SWP calculation.
- > Active polygon damping, 50% reduction (only for Europe).
- > Power supply 380 to 480V/3Ph/50Hz 60 Hz.
- > Low voltage control 48 V (115 or 230 as option).
- > Variable travelling speed on electric trolley.



Adaptive ESR deceleration ramp (ESR : faster lifting speed with light loads, up to 200%)

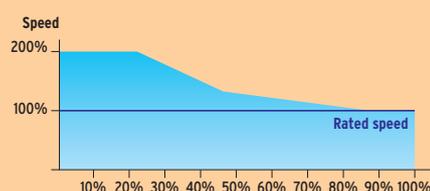

> Range of EUROCHAIN available in DIGICHAIN version

Capacity (kg)	Hoist type	Group		Hoisting speed (m/min)	Number of falls
		FEM	ISO		
63	VR2 0608b3	3m	M6	8 / 2	1
	VR2 0610b3	3m	M6	10 / 2	1
	VR2 0616b3	3m	M6	16 / 4	1
	VR2 0620b3	3m	M6	20 / 5	1
125	VR2 128 b3	3m	M6	8 / 2	1
	VR2 1210 b3	3m	M6	10 / 2	1
	VR2 1216 b2	2m	M5	16 / 4	1
	VR2 1220 b1	1Am	M4	20 / 5	1
	VR2 1220 b1	1Am	M4	0,64 → 24	1
160	VR2 168 b3	3m	M6	8 / 2	1
	VR2 1610 b3	3m	M6	10 / 2,5	1
	VR5 1224 V2	2m	M5	16 / 4	1
250	VR2 258 b2	2m	M5	8 / 2	1
	VR2 2510 b1	1Am	M4	10 / 2	1
	VR5 254 b3	3m	M6	4 / 1,3	1
	VR5 258 b3	3m	M6	8 / 1,3	1
	VR5 2516 b2	2m	M5	16 / 2,6	1
	VR5 2520 b1	1Am	M4	20 / 3,2	1
	VR 5 2516 V2	2m	M5	0,64 → 16	1
320	VR2 328 b1	1Am	M4	8 / 2	1
	VR5 3216 b1	1Am	M4	16 / 2,7	1
	VR 5 3212 V1	1Am	M4	0,64 → 12,5	1
500	VR5 504 b2	2m	M5	4 / 1	1
	VR5 508 b2	2m	M5	8 / 1	1
	VR5 5010 b1	1Am	M4	10 / 1	1
	VR 5 508 V2	2m	M5	0,32 → 8	1

■ EUROCHAIN VR VARIO

